





# Stainless AISI 316 Slides

fully telescopic, size 70

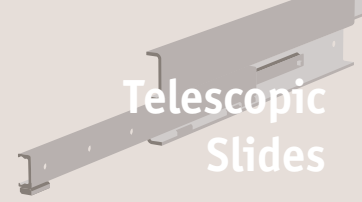

Telescopic Slides

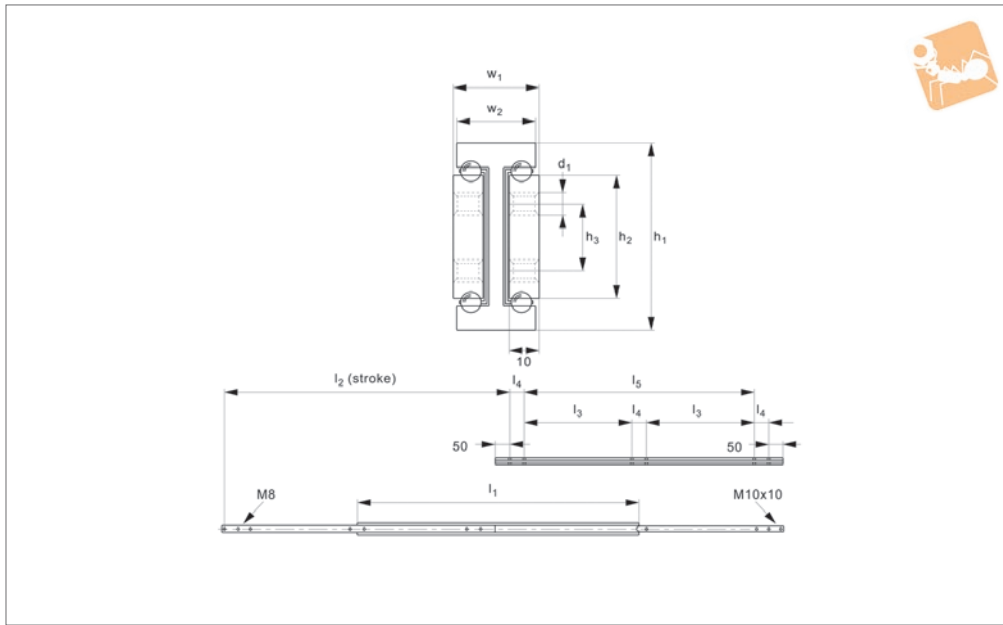

L2054

TELESCOPIC SLIDES

### Material

Stainless steel (A4, AISI 316) - rail, balls and ball cage.

an evenly distributed load centred around the mid extension point of the slide. Other sizes on request.

### Technical Notes

Full extension. Load ratings are based on

Ideal for applications requiring a high degree of corrosion resistance.

Order No.	$l_1$	$l_2$ stroke	$h_1$	$h_2$	$h_3$	$d_1$	$l_3$	$l_4$	$l_5$	$w_1$	$w_2$	Load/pair kg max.
L2054.0400	400	400	70	45	25	M8	-	200	50	32	30	470
L2054.0450	450	450	70	45	25	M8	-	250	50	32	30	460
L2054.0500	500	500	70	45	25	M8	-	300	50	32	30	450
L2054.0550	550	550	70	45	25	M8	-	350	50	32	30	440
L2054.0600	600	600	70	45	25	M8	-	400	50	32	30	430
L2054.0650	650	650	70	45	25	M8	200	-	50	32	30	420
L2054.0700	700	700	70	45	25	M8	225	-	50	32	30	410
L2054.0750	750	750	70	45	25	M8	250	-	50	32	30	400
L2054.0800	800	800	70	45	25	M8	275	-	50	32	30	390
L2054.0850	850	850	70	45	25	M8	300	-	50	32	30	380
L2054.0900	900	900	70	45	25	M8	325	-	50	32	30	370
L2054.0950	950	950	70	45	25	M8	350	-	50	32	30	360
L2054.1000	1000	1000	70	45	25	M8	375	-	50	32	30	350
L2054.1050	1050	1050	70	45	25	M8	400	-	50	32	30	340
L2054.1100	1100	1100	70	45	25	M8	425	-	50	32	30	330
L2054.1150	1150	1150	70	45	25	M8	450	-	50	32	30	320
L2054.1200	1200	1200	70	45	25	M8	475	-	50	32	30	310
L2054.1250	1250	1250	70	45	25	M8	500	-	50	32	30	300
L2054.1300	1300	1300	70	45	25	M8	525	-	50	32	30	290
L2054.1350	1350	1350	70	45	25	M8	550	-	50	32	30	280
L2054.1400	1400	1400	70	45	25	M8	575	-	50	32	30	270
L2054.1450	1450	1450	70	45	25	M8	600	-	50	32	30	260
L2054.1500	1500	1500	70	45	25	M8	625	-	50	32	30	250
L2054.1550	1550	1550	70	45	25	M8	650	-	50	32	30	240
L2054.1600	1600	1600	70	45	25	M8	675	-	50	32	30	230
L2054.1650	1650	1650	70	45	25	M8	700	-	50	32	30	220
L2054.1700	1700	1700	70	45	25	M8	650	-	100	32	30	210
L2054.1750	1750	1750	70	45	25	M8	675	-	100	32	30	200
L2054.1800	1800	1800	70	45	25	M8	700	-	100	32	30	190
L2054.1850	1850	1850	70	45	25	M8	725	-	100	32	30	180
L2054.1900	1900	1900	70	45	25	M8	750	-	100	32	30	170



Order No.	$l_1$	$l_2$ stroke	$h_1$	$h_2$	$h_3$	$d_1$	$l_3$	$l_4$	$l_5$	$w_1$	$w_2$	Load/pair kg max.
<b>L2054.1950</b>	1950	1950	70	45	25	M8	775	-	100	32	30	160
<b>L2054.2000</b>	2000	2000	70	45	25	M8	800	-	100	32	30	150